


# ACCESS 100 AC

## 2-way coaxial kit

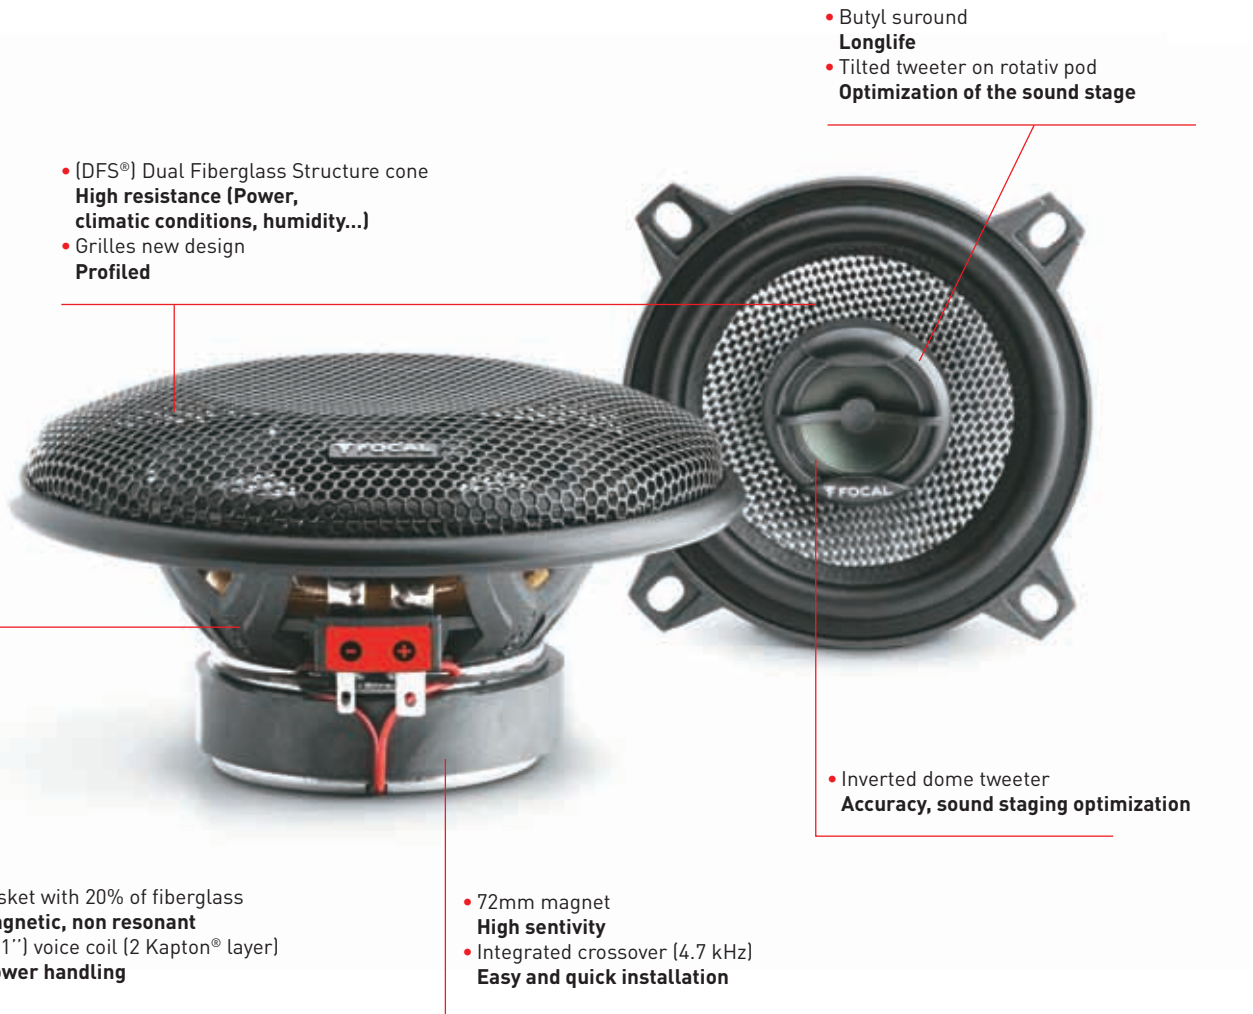

## WHAT MAKES THE DIFFERENCE

- Cone DFS® (Dual fiberglass Structure) (climatic and power) high resistance
- Compact basket
- Rotativ tweeter

## TECHNICAL CHARACTERISTICS

**Woofers:** 4" (100mm)

**Voice-coil diameter:** 1" (25mm)

**Voice-coil height:** 0.716" (11mm)

**Magnet:** 2.1316" (72mm)

**Max. power:** 80 Watts

**Nom. power:** 40 Watts RMS


**Sensitivity (2.83V/1m):** 87.2dB

**Frequency response:** 70Hz – 20kHz

VK 99,-

# ACCESS 130 AC

## 2-way coaxial kit

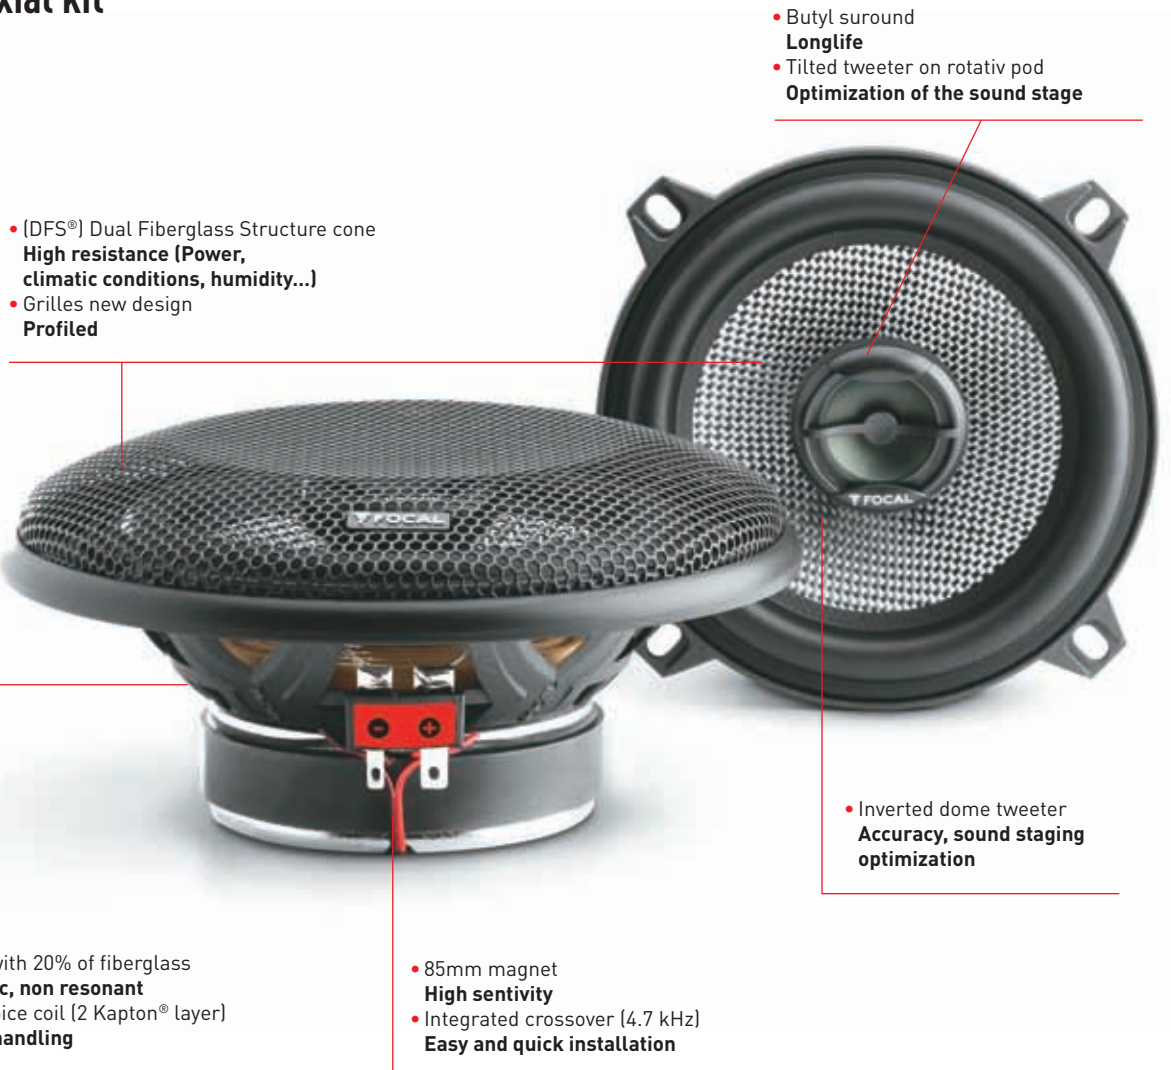

- (DFS<sup>®</sup>) Dual Fiberglass Structure cone  
**High resistance (Power, climatic conditions, humidity...)**
- Grilles new design  
**Profiled**

- Butyl surround  
**Longlife**
- Tilted tweeter on rotativ pod  
**Optimization of the sound stage**

- Inverted dome tweeter  
**Accuracy, sound staging optimization**

- ABS basket with 20% of fiberglass  
**Non magnetic, non resonant**
- 25mm (1") voice coil (2 Kapton<sup>®</sup> layer)  
**High power handling**

- 85mm magnet  
**High sentivity**
- Integrated crossover (4.7 kHz)  
**Easy and quick installation**

## WHAT MAKES THE DIFFERENCE

- Cone DFS<sup>®</sup> (Dual fiberglass Structure) (climatic and power) high resistance
- Extremely dynamic sound
- Rotativ tweeter

## TECHNICAL CHARACTERISTICS

**Woofers:** 5" (130mm)

**Voice-coil diameter:** 1" (25mm)

**Voice-coil height:** 0<sup>7</sup>/<sub>16</sub>" (11mm)

**Magnet:** 3<sup>1</sup>/<sub>3</sub>" (85mm)

**Tweeter:** Aluminum inverted dome

**Crossover:** (4,7Khz) 6dB/oct

**Max. power:** 100 Watts

**Nom. power:** 50 Watts RMS

**Sensitivity (2.83V/1m):** 89.3dB

**Frequency response:** 70Hz – 20kHz

**Accessories:** Supplied grilles


**VK 109,-**

**Performance F-A165AC**



**ACCESS  
165 AC**

**2-way coaxial kit**

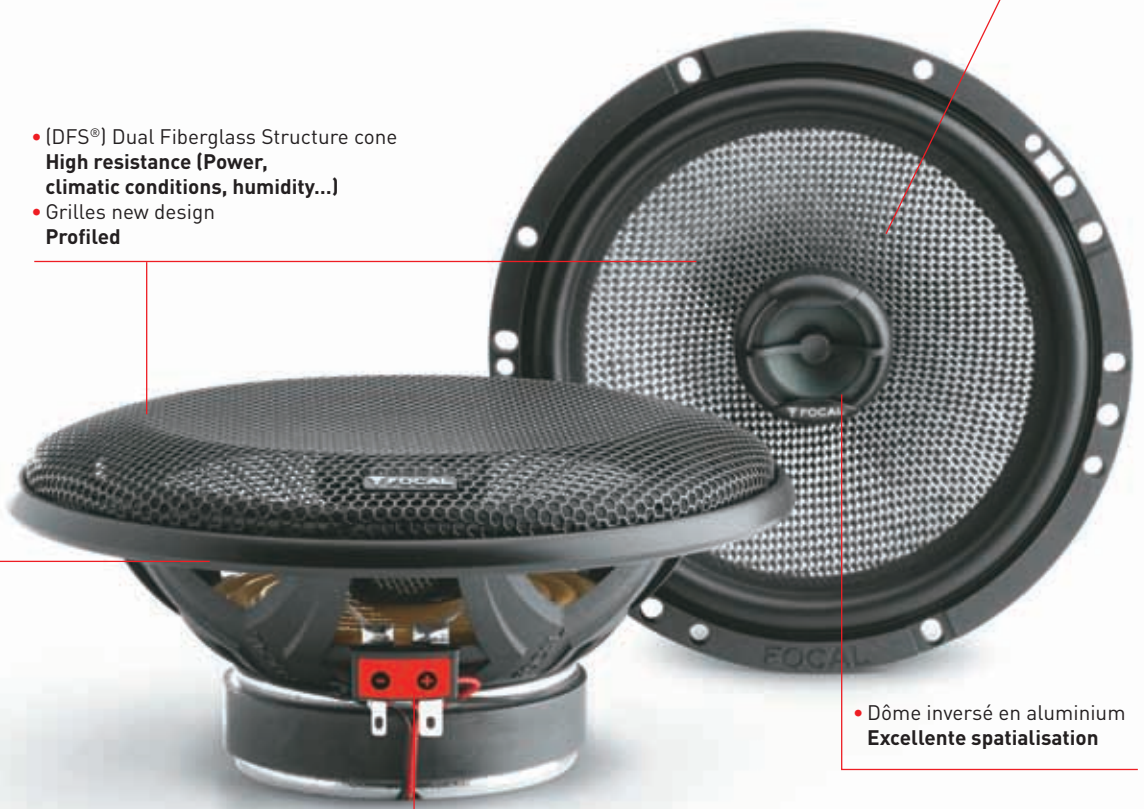

- (DFS<sup>®</sup>) Dual Fiberglass Structure cone  
**High resistance (Power, climatic conditions, humidity...)**
- Grilles new design  
**Profiled**

- Butyl surround  
**Longlife**
- Tilted tweeter on rotativ pod  
**Optimization of the sound stage**

- Dôme inversé en aluminium  
**Excellente spatialisation**

- ABS basket with 20% of fiberglass  
**Non magnetic, non resonant**
- 25mm (1") voice coil (2 Kapton<sup>®</sup> layer)  
**High power handling**

- 85mm magnet  
**High sensitivity**
- Integrated crossover (4.7 kHz)  
**Easy and quick installation**

**WHAT MAKES THE DIFFERENCE**

- Cone DFS<sup>®</sup> (Dual fiberglass Structure) (climatic and power) high resistance
- High sensitivity (Direct headunit using)
- High dynamique
- Rotativ tweeter

**TECHNICAL CHARACTERISTICS**

**Woofers:** 6<sup>1</sup>/<sub>2</sub>" (165mm)  
**Voice-coil diameter:** 1" (25mm)  
**Voice-coil height:** 0<sup>7</sup>/<sub>16</sub>" (11mm)  
**Magnet:** 3<sup>1</sup>/<sub>3</sub>" (85mm)  
**Tweeter:** Aluminum inverted dome  
**Crossover:** (4,7Khz) 6dB/oct

**Max. power:** 120 Watts  
**Nom. power:** 60 Watts RMS  
**Sensitivity (2.83V/1m):** 91dB  
**Frequency response:** 60Hz – 20kHz  
**Accessories:** Supplied grilles

**VK 109,-**




**Performance F-A570AC**



**ACCESS  
570 AC**

**2-way coaxial kit**

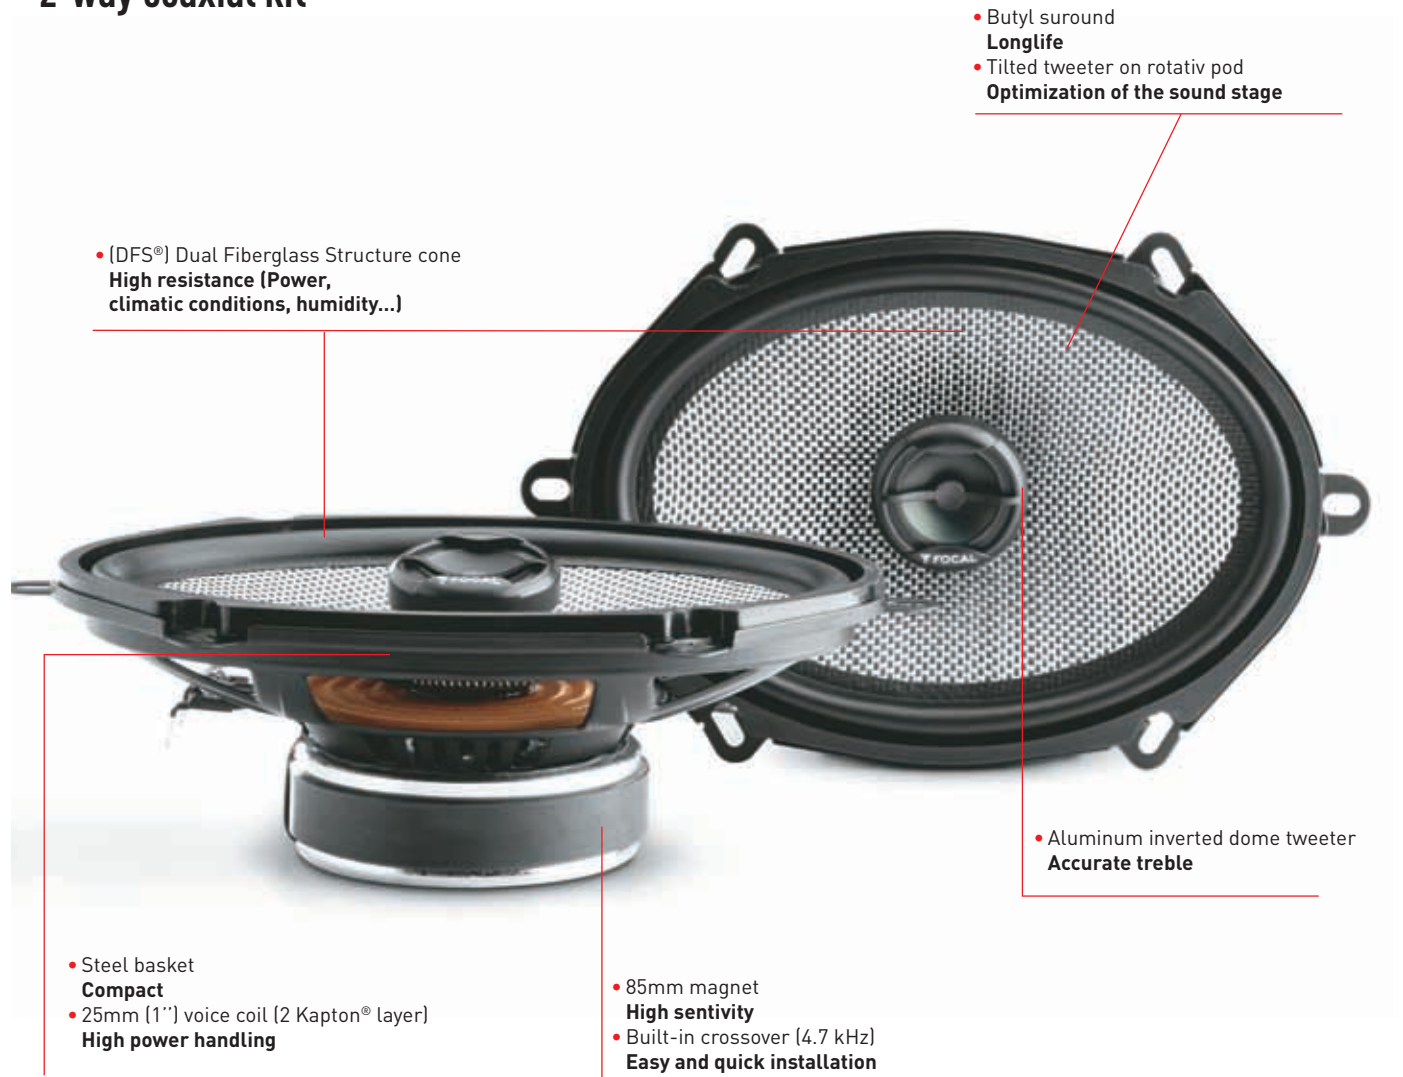

• (DFS<sup>®</sup>) Dual Fiberglass Structure cone  
**High resistance (Power, climatic conditions, humidity...)**

• Butyl surround  
**Longlife**  
• Tilted tweeter on rotativ pod  
**Optimization of the sound stage**

• Steel basket  
**Compact**  
• 25mm (1") voice coil (2 Kapton<sup>®</sup> layer)  
**High power handling**

• 85mm magnet  
**High sentivity**  
• Built-in crossover (4.7 kHz)  
**Easy and quick installation**

• Aluminum inverted dome tweeter  
**Accurate treble**

**WHAT MAKES THE DIFFERENCE**

- Cone DFS<sup>®</sup> (Dual fiberglass Structure), (climatic and power) high resistance
- Specific for Ford Jeep and Dodge cars
- High dynamique - deep bass
- Rotativ tweeter

**TECHNICAL CHARACTERISTICS**


**Woofer:** 5x7" (130x180mm)  
**Voice-coil diameter:** 1" (25mm)  
**Voice-coil height:** 0<sup>7</sup>/<sub>16</sub>" (11mm)  
**Magnet:** 3<sup>1</sup>/<sub>3</sub>" (85mm)  
**Tweeter:** Aluminum inverted dome  
**Crossover:** (4,7Khz) 6dB/oct

**Max. power:** 120 Watts  
**Nom. power:** 60 Watts RMS  
**Sensitivity (2.83V/1m):** 88.65dB  
**Frequency response:** 65Hz – 20kHz  
**Accessories:** Without grille

**VK 109,-**

# ACCESS 690 AC

## 2-way coaxial kit

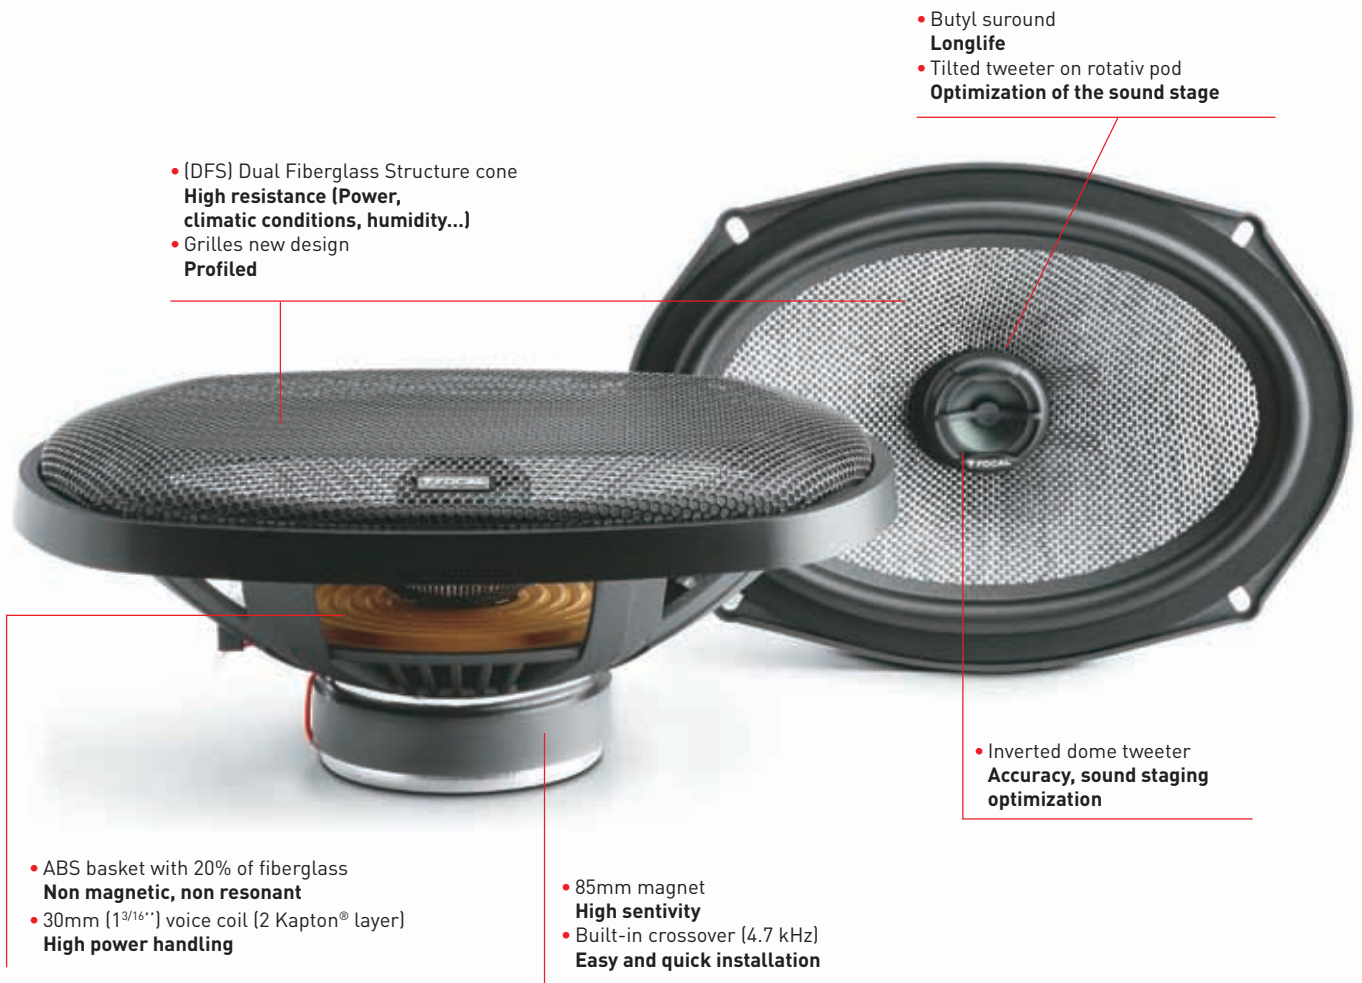

## WHAT MAKES THE DIFFERENCE

- Cone DFS® (Dual fiberglass Structure), (climatic and power) high resistance
- High power handling and heavy bass
- Rotativ tweeter

## TECHNICAL CHARACTERISTICS

**Woofer:** 6x9" (164x235mm)

**Voice-coil diameter:** 1<sup>3/16</sup>" (30mm)

**Voice-coil height:** 0<sup>7/16</sup>" (11mm)

**Magnet:** 3<sup>9/16</sup>" (90mm)

**Tweeter:** Aluminum inverted dome

**Crossover:** (4,7KHz) 6dB/oct

**Max. power:** 150 Watts

**Nom. power:** 75 Watts RMS

**Sensitivity (2.83V/1m):** 91.3dB

**Frequency response:** 50Hz – 20kHz

**Accessories:** Supplied grilles

VK 119,-